

**HONDA**

**V-Twin Series Engines**



# We raised the bar on everything.

Honda's V-Twins have been redesigned from the ground up.

The result is a highly advanced style of engine that not only looks different, but works harder than ever and offers exceptional versatility.

Honda Engines already have a legendary reputation for toughness, reliability, quiet operation and fuel efficiency. Our V-Twins also offer higher horsepower, improved adaptability, greater compactness, convenient controls, greater fuel economy and a 3-year engine warranty.

Plus, customers notice Honda Engines. Honda adds value to your product and speaks volumes about quality, attention to detail, and jobs well done.



## Our 3-Year Warranty



Honda V-Twin Series engines come with a 3-year warranty. This warranty applies to GX series engines 100cc or larger purchased at retail or put into rental service after January 1st, 2009.

# Why they're the best.

## More Power


Our Hemispherical Combustion Chamber was inspired by Honda's racing technology and offers the highest V-Twin compression ratio on the market. The power is transmitted through forged-steel connecting rods and a forged-steel crankshaft, supported by a full-pressure lubrication system. This means increased engine efficiency and more thorough transfer of power to your application.

## More Compact

Our V-Twin engines provide extraordinary applied technology and power output. Add in exceptional compactness and the result is more net horsepower you can truly use.


## Proven Fuel Economy

We've always been known for fuel efficiency, but these V-Twins have raised the bar again. A Two Barrel Inner-vent Carburetor provides more precise fuel metering for optimal air/fuel ratio. Meanwhile, our Multi-Layer Density Gradient Air Filter captures dirt better which offers a higher degree of engine protection, improved fuel economy and cuts down on maintenance intervals. The bottom line is fuel economy comparable to fuel injection with the simplicity of carburetion.

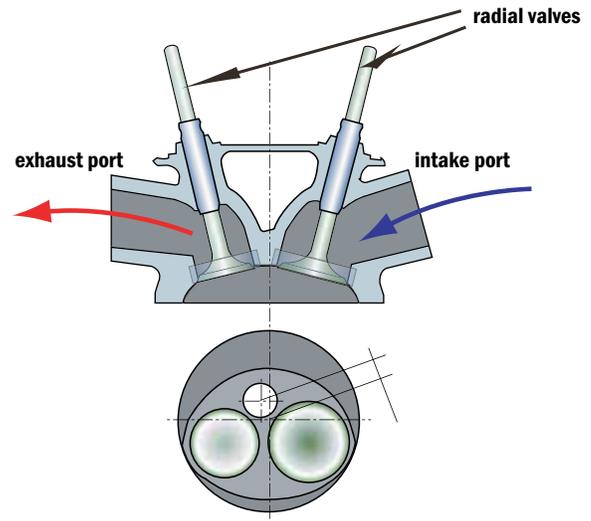


*The hemispherical combustion chamber and nearly-centered spark plug layout delivers rapid and efficient combustion.*

## Improved Lubrication and Cooling

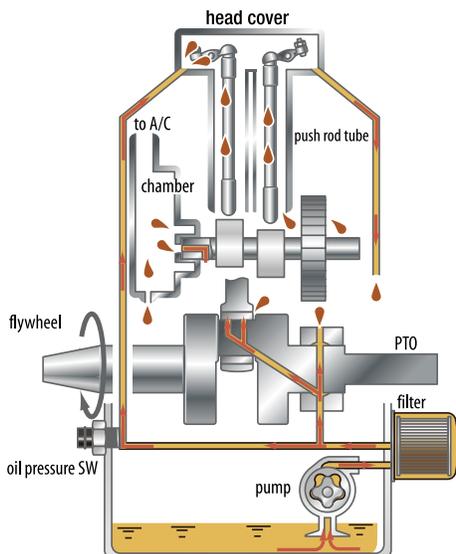

*The lubrication system uses a high capacity pump with discrete chambers to facilitate consistent oil delivery thus reducing friction and extending engine life.*

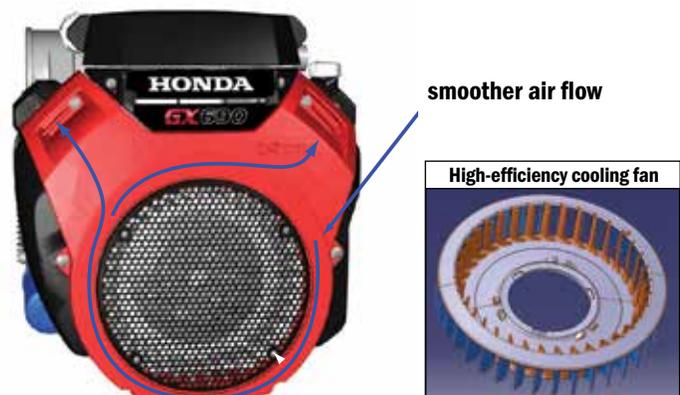


*Cooling performance is improved while noise is reduced with the large diameter air intake, optimized 36-blade cooling fan and smooth scroll-shaped resin shroud.*

## Fewer Parts That Add Up To More

While we're talking about all the things that go into our V-Twins, let's mention a few things that don't: like catalytic converters, head gaskets and head bolts. They're not necessary. In fact, our V-Twins have fewer parts but this means a lot of benefits. Like better cooling and a lot less to go wrong, providing more overall durability. Fewer parts also mean a quieter running engine with unprecedented performance.

## Variable Timing Digital CDI

Another impressive feature is our Variable Timing Digital CDI ignition. It allows optimal ignition timing based on engine speed. This provides for excellent starting, high power output, and reduced fuel consumption for outstanding emissions performance. An engine rev limiter is also incorporated to prevent over-revving.

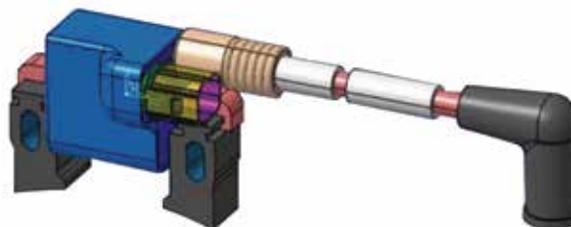

*Digital CDI Ignition Coil*

## Low Emissions

Honda Engines are certified to comply with both CARB (the California Air Resources Board) and the EPA (Environmental Protection Agency) emission regulations. Our V-Twin engines meet the current emission requirements set by both CARB and the EPA — with no need for a catalytic converter.

## Convenient Controls and Higher Capacity Charging System



*The V-Twin control box, depending on model, includes the start/stop switch, choke and throttle controls, an Oil Alert® LED and a built-in hour meter.*

12V-2.7A



12V-17A



New  
12V-26A





*High-power multi-pole charge coil system*

# Horizontal Shaft GX630




Engine Type	Air-cooled, 4-Stroke, OHV Horizontal
Bore x Stroke	3.1" x 2.8" (78 x 72 mm)
Displacement	42 cu in (688 cm <sup>3</sup> )
Compression Ratio	9.3 : 1
Net Power*	20.8 hp (15.5 kW)
Net Torque*	35.6 lbs ft (48.3 Nm)
PTO Shaft Rotation	Counterclockwise (from PTO shaft side)
Ignition System	Digital CDI with variable ignition timing
Starting System	Shift Type
Carburetor	2-barrel, fuel cut solenoid, inner vent
Lubrication System	Full Pressure
Connecting Rod	Forged Steel
Governor System	Mechanical
Air Cleaner	Dual Element Type/Cylindrical
Exhaust Emissions	Certified for use in all 50 states
Evaporative Emissions	Low permeation hose and purge joint provided
Oil Capacity	2.1 US qt (2.0 L)
Oil Filter	Automotive Spin-On Style
Dimensions (L x W x H)	15.9" (405 mm) x 16.1" (410 mm) x 17.2" (438 mm)
Dry Weight	98 lbs (44.4 kg)




## HORIZONTAL PTO SHAFT OPTIONS


B type




D type




Q type



V type



T type





\* The power rating of the engines indicated in this document measures the net power output at 3600 rpm and net torque at 2500 rpm, as tested on a production engine. Mass production engines may vary from this value. Actual power output for the engine installed in the final machine will vary depending on numerous factors, including the operating speed of the engine in application, environmental conditions, maintenance and other variables.

# Horizontal Shaft

## GX690



Engine Type	Air-cooled, 4-Stroke, OHV Horizontal
Bore x Stroke	3.1" x 2.8" (78 x 72 mm)
Displacement	42 cu in (688 cm <sup>3</sup> )
Compression Ratio	9.3 : 1
Net Power*	22.1 hp (16.5 kW)
Net Torque*	35.6 lbs ft (48.3 Nm)
PTO Shaft Rotation	Counterclockwise (from PTO shaft side)
Ignition System	Digital CDI with variable ignition timing
Starting System	Shift Type
Carburetor	2-barrel, fuel cut solenoid, inner vent
Lubrication System	Full Pressure
Connecting Rod	Forged Steel
Governor System	Mechanical
Air Cleaner	Dual Element Type/Cylindrical
Exhaust Emissions	Certified for use in all 50 states
Evaporative Emissions	Low permeation hose and purge joint provided
Oil Capacity	2.1 US qt (2.0 L)
Oil Filter	Automotive Spin-On Style
Dimensions (L x W x H)	15.9" (405 mm) x 16.1" (410 mm) x 17.2" (438 mm)
Dry Weight	98 lbs (44.4 kg)





# Vertical Shaft

## GXV630




Engine Type	Air-cooled, 4-Stroke, OHV Vertical
Bore x Stroke	3.1" x 2.8" (78 x 72 mm)
Displacement	42 cu in (688.1 cm <sup>3</sup> )
Compression Ratio	9.3 : 1
Net Power*	20.8 hp (15.5 kW)
Net Torque*	35.6 lbs ft (48.3 Nm)
PTO Shaft Rotation	Counterclockwise (from PTO shaft side)
Ignition System	Digital CDI with variable ignition timing
Starting System	Shift Type
Carburetor	2-barrel, fuel cut solenoid, inner vent
Lubrication System	Full Pressure
Connecting Rod	Forged Steel
Governor System	Mechanical
Air Cleaner	Dual Element Type/Panel
Exhaust Emissions	Certified for use in all 50 states
Evaporative Emissions	Low permeation hose and purge joint provided
Oil Capacity	2.3 US qt (2.2 L)
Oil Filter	Automotive Spin-On Style
Dimensions (L x W x H)	17.4" (443 mm) x 16.6" (421 mm) x 17.6" (447 mm)
Dry Weight	101 lbs (45.7 kg)




### VERTICAL PTO SHAFT OPTIONS

Q type



T type





\* The power rating of the engines indicated in this document measures the net power output at 3600 rpm and net torque at 2500 rpm, as tested on a production engine. Mass production engines may vary from this value. Actual power output for the engine installed in the final machine will vary depending on numerous factors, including the operating speed of the engine in application, environmental conditions, maintenance and other variables.

# Vertical Shaft

## GXV690




Engine Type	Air-cooled, 4-Stroke, OHV Vertical
Bore x Stroke	3.1" x 2.8" (78 x 72 mm)
Displacement	42 cu in (688.1 cm <sup>3</sup> )
Compression Ratio	9.3 : 1
Net Power*	22.1 hp (16.5 kW)
Net Torque*	35.6 lbs ft (48.3 Nm)
PTO Shaft Rotation	Counterclockwise (from PTO shaft side)
Ignition System	Digital CDI with variable ignition timing
Starting System	Shift Type
Carburetor	2-barrel, fuel cut solenoid, inner vent
Lubrication System	Full Pressure
Connecting Rod	Forged Steel
Governor System	Mechanical
Air Cleaner	Dual Element Type/Panel
Exhaust Emissions	Certified for use in all 50 states
Evaporative Emissions	Low permeation hose and purge joint provided
Oil Capacity	2.3 US qt (2.2 L)
Oil Filter	Automotive Spin-On Style
Dimensions (L x W x H)	17.4" (443 mm) x 16.6" (421 mm) x 17.6" (447 mm)
Dry Weight	101 lbs (45.7 kg)



# An integrated cylinder & head mean better performance.

The idea of integrating the cylinder & head into one unit is radical. Radically smart. It eliminates the head gasket, head bolts and allows for more airflow and better cooling. Speaking of cooling, improved cooling means better combustion management. Cooling is also improved by each of the lightweight aluminum pushrods being housed in a separate tube to enhance airflow. When you put it all together (with fewer parts) you get an engine with reduced emissions and greater-than-ever durability. All of which is backed with a 3-year warranty.

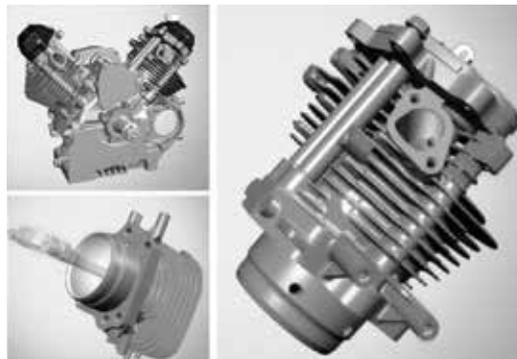

*Integrated cylinder and head structure*

## Service made easy.

Our V-Twins are engineered with easy maintenance in mind. No cylinder head gasket and fewer overall parts make the engine more durable. Our Multi-Layer Density Gradient Air Filter helps to extend the period of time between service intervals. An automotive-style spin-on oil filter provides excellent filtering capacity and easy replacement. There's even an optional oil alert and digital hour meter to provide quick access to information for the owner and technician. Then, of course, there's our 3-year warranty and the proven Honda service network made up of thousands of dealers from coast-to-coast.

When you compare all the benefits, we're sure you'll agree, Honda gives you the best overall product value.

### Improved Air Cleaning



*High density filter media*



*Dual cylindrical filter*



*Dual panel filter*

Air cleaning upgrades include new high-density multi-gradient media, a dual cylindrical filter on the horizontals and a dual panel-type filter on the verticals.

# Honda Engine Distributors

## ALABAMA

MTA DISTRIBUTORS  
SEE TENNESSEE

## ALASKA

SCOTSCO, INC.  
SEE OREGON

## ARIZONA

TRU-POWER, INC.  
SEE SOUTHERN CALIFORNIA

## ARKANSAS

LIGHTBOURN EQUIPMENT  
SEE TEXAS

## CALIFORNIA

*Northern California*  
PACE WEST, INC.  
www.pacelink.com  
5850 Adler Circle  
Sacramento, CA 95828  
(734) 453-6258  
FAX (916) 383-6550  
pace@pacelink.com

*Southern California*  
MTA DISTRIBUTORS SEE  
TENNESSEE

## COLORADO

ANDERSON INDUSTRIAL  
ENGINES  
SEE NEBRASKA

## CONNECTICUT

EASTERN EQUIPMENT, INC.  
SEE NEW HAMPSHIRE

## DELAWARE

TIDEWATER  
SEE VIRGINIA

## DISTRICT OF COLUMBIA

TIDEWATER  
SEE VIRGINIA

## FLORIDA

MTA DISTRIBUTORS  
SEE TENNESSEE

## GEORGIA

MTA DISTRIBUTORS  
SEE TENNESSEE

## HAWAII

SCOTSCO, INC.  
SEE OREGON

## IDAHO

SCOTSCO, INC.  
SEE OREGON

## ILLINOIS

PACE, INC.  
SEE MICHIGAN

## INDIANA

PACE, INC.  
SEE MICHIGAN

## IOWA

IOWA POWER PRODUCTS  
www.iowapower.com  
522 Brooks Road  
Iowa Falls, IA 50126  
(641) 648-2507  
FAX (641) 648-5013  
iowapower@iowapower.com

## KANSAS

ANDERSON  
INDUSTRIAL ENGINES  
www.ai-engines.com  
80 S. James Street  
Kansas City, KS 66118  
(913) 321-7040  
Fax (913) 321-7341  
info@ai-engines.com

## KENTUCKY

MTA DISTRIBUTORS  
SEE TENNESSEE

*Northern Kentucky/  
Cincinnati area*  
HAYWARD DISTRIBUTING  
SEE OHIO

## LOUISIANA

LIGHTBOURN EQUIPMENT  
SEE TEXAS

## MAINE

EASTERN EQUIPMENT, INC.  
SEE NEW HAMPSHIRE

## MARYLAND

TIDEWATER  
SEE VIRGINIA

## MASSACHUSETTS

EASTERN EQUIPMENT, INC.  
SEE NEW HAMPSHIRE

## MICHIGAN

PACE, INC.  
www.pacelink.com  
739 South Mill  
Plymouth, MI 48170  
(734) 453-6258  
FAX (734) 453-5320  
pace@pacelink.com

*Northern Michigan*  
ENGINE POWER INC.  
SEE WISCONSIN

## MINNESOTA

GREAT NORTHERN  
EQUIP. DIST.  
www.gnedi.com  
20195 South Diamond Lake Rd.  
Rogers, MN 55374  
(763) 428-2237  
FAX (763) 428-4821  
chrisb@gnedi.com

## MISSISSIPPI

MTA DISTRIBUTORS  
SEE TENNESSEE

## MISSOURI

ANDERSON  
INDUSTRIAL ENGINES  
SEE KANSAS

## MONTANA

SCOTSCO, INC.  
SEE OREGON

## NEBRASKA

ANDERSON  
INDUSTRIAL ENGINES  
www.ai-engines.com  
13423 Lynam Drive  
Omaha, NE 68138  
(402) 558-8700  
FAX (402) 558-8249  
info@ai-engines.com

## NEVADA

PACE WEST, INC.  
SEE NORTHERN CALIFORNIA

## NEW HAMPSHIRE

EASTERN EQUIPMENT, INC.  
www.easternequipmentinc.com  
6 "B" Street  
Derry, NH 03038  
(603) 437-0407  
FAX (603) 437-0815  
gmiscoeastern@aol.com

## NEW JERSEY

TIDEWATER  
SEE VIRGINIA

## NEW MEXICO

LIGHTBOURN EQUIPMENT  
SEE TEXAS

## NEW YORK

EASTERN EQUIPMENT, INC.  
SEE NEW HAMPSHIRE

## NORTH CAROLINA

TIDEWATER  
SEE VIRGINIA

## NORTH DAKOTA

GREAT NORTHERN  
EQUIPMENT  
SEE MINNESOTA

## OHIO

HAYWARD DISTRIBUTING  
www.haydist.com  
4061 Perimeter Drive  
Columbus, OH 43228  
(614) 272-5953  
FAX (614) 272-5959  
mbudde@haydist.com

*North Western Ohio*

PACE, INC.  
SEE MICHIGAN

## OKLAHOMA

LIGHTBOURN EQUIPMENT  
SEE TEXAS

## OREGON

SCOTSCO, INC.  
www.scotsco.com  
16750 SE Kens Ct.  
Milwaukie, OR 97267  
(503) 653-7791  
FAX (503) 653-7838  
tfrandsen@scotsco.com

## PENNSYLVANIA

HAYWARD DISTRIBUTING  
SEE OHIO

## RHODE ISLAND

EASTERN EQUIPMENT, INC.  
SEE NEW HAMPSHIRE

## SOUTH CAROLINA

TIDEWATER  
SEE VIRGINIA

## SOUTH DAKOTA

GREAT NORTHERN  
EQUIPMENT  
SEE MINNESOTA

## TENNESSEE

MTA DISTRIBUTORS  
www.mtadistributors.com  
555 Hickory Hills Blvd.  
Whites Creek, TN 37189-9244  
(615) 299-8777  
FAX (615) 299-0464  
customerservice  
@mtadistributors.com

## TEXAS

LIGHTBOURN EQUIPMENT  
www.lightbourneequipment.com  
13655 Welch Road  
Dallas, TX 75244  
(972) 233-5151  
FAX (972) 661-0738  
sales@lightbourneequipment.com

## UTAH

PACE WEST, INC.  
SEE NORTHERN CALIFORNIA

## VERMONT

EASTERN EQUIPMENT, INC.  
SEE NEW HAMPSHIRE

## VIRGINIA

TIDEWATER POWER  
EQUIP. CO.  
www.tpeco.com  
3760 East Virginia Beach Blvd.  
Norfolk, VA 23502  
(757) 464-1755  
FAX (800) 288-8953  
info@tpeco.com

## WASHINGTON

SCOTSCO, INC.  
SEE OREGON

## WEST VIRGINIA

HAYWARD DISTRIBUTING  
SEE OHIO

## WISCONSIN

ENGINE POWER, INC.  
www.enginepower.com  
1830 Executive Drive  
Oconomowoc, WI 53066  
(262) 567-8575  
FAX (262) 567-2556  
postoff@enginepower.com

## WYOMING

ANDERSON  
INDUSTRIAL ENGINES  
SEE NEBRASKA

**Honda. The largest manufacturer of gasoline engines in the world.**



**GC SERIES**



**GS SERIES**



**GX SERIES**



**iGX SERIES**



**V-TWIN SERIES**



**MINI 4-STROKE SERIES**



**iGX V-TWIN SERIES**

**HONDA**

**Visit us at [engines.honda.com](http://engines.honda.com)**

For optimum performance and safety we recommend you read the owner's manual before operating your Honda Power Equipment. Specifications subject to change without notice.

All images contained herein are either owned by American Honda Motor Co., Inc., or used under a valid license. It is a violation of federal law to reproduce these images without express written permission from American Honda Motor Co., Inc., or the individual copyright owner of such images. All rights reserved. Honda, the Honda Engines logo, Honda engine model names and their trade dress are trademarks of Honda Motor Co., Ltd. used under license from American Honda Motor Co., Inc. Many Honda engine and vehicle model names, and associated trade dress may be seen at [www.honda.com](http://www.honda.com). ©2015-2019 American Honda Motor Co., Inc.

